


INTRODUCTION

Available in a wide range of filter efficiencies to suit each application, the pocket filters offer great filtration performance at affordable pricing.

Manufactured from Airguard Envirocare approved synthetic media (which is free from harmful substances like glass fibers) and formed into heat-sealed pockets and enclosed in a galvanised header frame.

It offers a high dust holding capacity with low initial pressure losses to ensure maximum filter-like cycles are achieved.

Widely used in many environments..

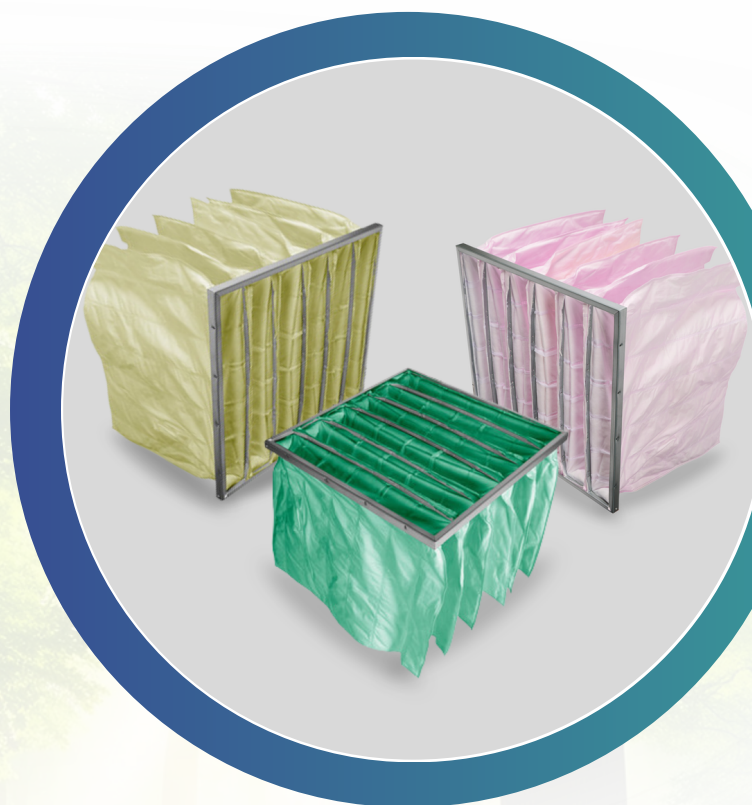

[Enquire Now](#)

APPLICATIONS

An ideal secondary stage filter or pre-filter to HEPA filters for use in heating & Ventilation and Air conditioning system.

- Office Blocks
- Hotels
- Hospitals
- Computer Suites
- Food Industry
- Pharmaceutical Industry

PRODUCT OPTIONS AVAILABLE

- Wide range of standard sizes off the shelf
- Non-standard sizes are available and made to order
- 20mm Galvanised header as standard (25mm available as an option)

Performance Details

Grade	Filter Size		Pocket	Rated Capacity (m3/s)	Resistance Pascals	
	Nominal h x w x d	Actual h x w x d			Initial	Final
ISO 16890 ePM10 65% EN779:2012 M5	600 x 300 x 380	592 x 287 x 380	3	0.47	135	500
	600 x 500 x 380	592 x 492 x 380	5	0.70	135	500
	600 x 600 x 380	592 x 592 x 380	6	0.94	135	500
	600 x 300 x 500	592 x 287 x 500	3	0.47	115	500
	600 x 500 x 500	592 x 492 x 500	5	0.70	115	500
	600 x 600 x 500	592 x 592 x 500	6	0.94	115	500
	600 x 300 x 635	592 x 287 x 635	3	0.47	95	500
	600 x 500 x 635	592 x 492 x 635	5	0.70	95	500
ISO 16890 ePM10 75% EN779:2012 F6	600 x 600 x 635	592 x 592 x 635	6	0.94	95	500
	600 x 300 x 380	592 x 287 x 380	3	0.47	140	500
	600 x 500 x 380	592 x 492 x 380	5	0.70	140	500
	600 x 600 x 380	592 x 592 x 380	6	0.94	140	500
	600 x 300 x 500	592 x 287 x 500	3	0.47	120	500
	600 x 500 x 500	592 x 492 x 500	5	0.70	120	500
	600 x 600 x 500	592 x 592 x 500	6	0.94	120	500
	600 x 300 x 635	592 x 287 x 635	3	0.47	100	500
	600 x 500 x 635	592 x 492 x 635	5	0.70	100	500
	600 x 600 x 635	592 x 592 x 635	6	0.94	100	500
	600 x 300 x 380	592 x 287 x 380	3	0.47	145	500
	600 x 500 x 380	592 x 492 x 380	5	0.70	145	500
	600 x 600 x 380	592 x 592 x 380	6	0.94	145	500
ISO 16890 ePM10 90% EN779:2012 F7	600 x 300 x 500	592 x 287 x 500	3	0.47	125	500
	600 x 500 x 500	592 x 492 x 500	5	0.70	125	500
	600 x 600 x 500	592 x 592 x 500	6	0.94	125	500
	600 x 300 x 635	592 x 287 x 635	3	0.47	105	500
	600 x 500 x 635	592 x 492 x 635	5	0.70	105	500
	600 x 600 x 635	592 x 592 x 635	6	0.94	105	500

Performance Details

Grade	Filter Size		Pocket	Rated Capacity (m3/s)	Resistance Pascals	
	Nominal h x w x d	Actual h x w x d			Initial	Final
ISO 16890 ePM10 60-65% EN779:2012 F8	600 x 300 x 380	592 x 287 x 380	3	0.47	150	500
	600 x 500 x 380	592 x 492 x 380	5	0.70	150	500
	600 x 600 x 380	592 x 592 x 380	6	0.94	150	500
	600 x 300 x 500	592 x 287 x 500	3	0.47	130	500
	600 x 500 x 500	592 x 492 x 500	5	0.70	130	500
	600 x 600 x 500	592 x 592 x 500	6	0.94	130	500
	600 x 300 x 635	592 x 287 x 635	3	0.47	110	500
	600 x 500 x 635	592 x 492 x 635	5	0.70	110	500
ISO 16890 ePM10 80% EN779:2012 F9	600 x 600 x 635	592 x 592 x 635	6	0.94	110	500
	600 x 300 x 380	592 x 287 x 380	3	0.24	145	500
	600 x 500 x 380	592 x 492 x 380	5	0.39	145	500
	600 x 600 x 380	592 x 592 x 380	6	0.47	145	500
	600 x 300 x 500	592 x 287 x 500	3	0.30	155	500
	600 x 500 x 500	592 x 492 x 500	5	0.50	155	500
	600 x 600 x 500	592 x 592 x 500	6	0.58	155	500
	600 x 300 x 635	592 x 287 x 635	3	0.36	155	500
	600 x 500 x 635	592 x 492 x 635	5	0.61	155	500
	600 x 600 x 635	592 x 592 x 635	6	0.72	155	500

